


DIN 6912

Zylinderschraube mit ISK, niedriger Kopf mit Schlüsselführung

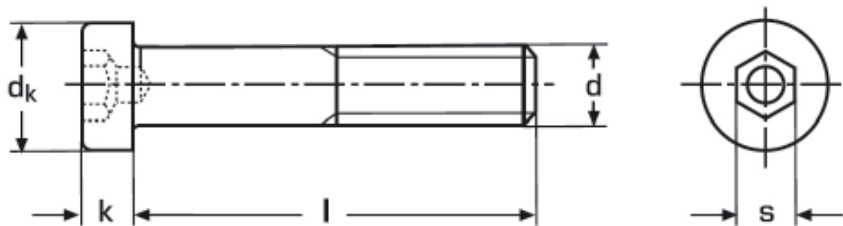

d	M 4	M 5	M 6	M 8	M 10	M 12	M 14	M 16	M 18	M 20	M 24
dk	7	8,5	10	13	16	18	21	24	27	30	36
k	2,8	3,5	4	5	6,5	7,5	8,5	10	11	12	14
s	3	4	5	6	8	10	12	14	14	17	19
l											
6											
8											
10											
12											
14											
16											
18											
20											
25											
30											
35											
40											
45											
50											
55											
60											
65											
70											
80											
90											
100											
110											
120											
130											
140											
150											