


# DIN 7991 (ISO 10642)


## Senkschraube mit Innensechskant

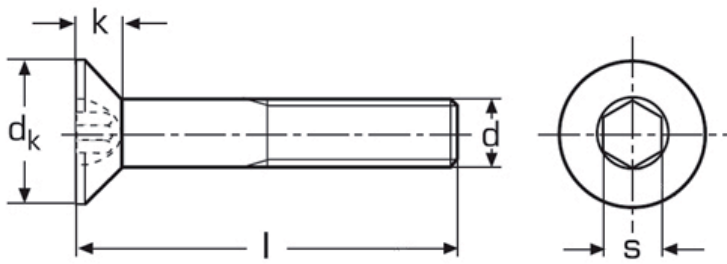

d	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8
dk	4	5	6	8	10	12	16
k	1,2	1,45	1,7	2,3	2,8	3,3	4,4
s	1,3	1,5	2	2,5	3	4	5
l							
3							
4							
5							
6							
8							
10							
12							
14							
16							
18							
20							
22							
25							
30							
35							
40							
45							
50							
55							
60							
65							
70							
80							
90							
100							
110							
120							
130							
140							

# DIN 7991 (ISO 10642)

## Senkschraube mit Innensechskant

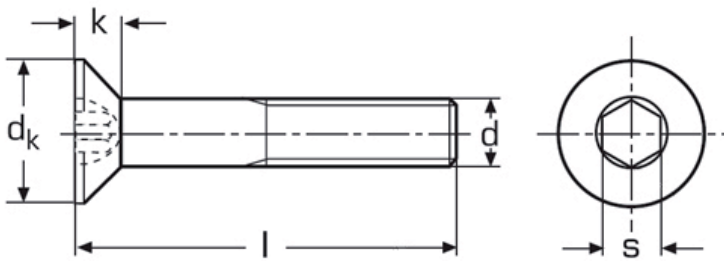

d	M 10	M 12	M 14	M 16	M 20	M 24
dk	20	24	27	30	36	39
k	5,5	6,5	7	7,5	8,5	14
s	6	8	10	10	12	14
<b>l</b>						
10						
12						
14						
16						
20						
25						
30						
35						
40						
45						
50						
55						
60						
65						
70						
80						
90						
100						
110						
120						
130						
140						
150						
160						
170						
180						

Zwischenabmessungen und Überlängen auf Anfrage.