


# DIN 912 (ISO 4762)


## Zylinderschraube mit Innensechskant

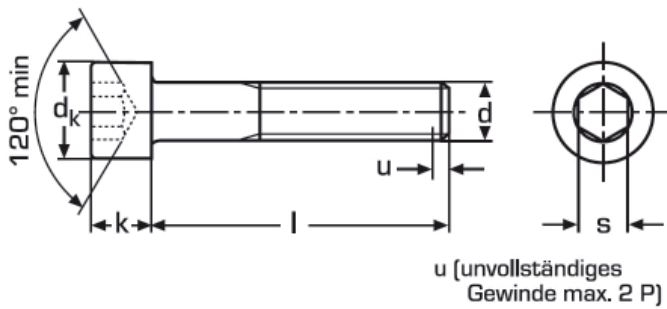

d	M 1,4	M 1,6	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8
dk	2,6	3	3,8	4,5	5,5	7	8,5	10	13
k max.	1,4	1,6	2	2,5	3	4	5	6	8
b	-	15	16	17	18	20	22	24	28
s	1,3	1,5	1,5	2	2,5	3	4	5	6
l									
3									
4									
5									
6									
8									
10									
12									
14									
16									
18									
20									
25									
30									
35									
40									
45									
50									
55									
60									
65									
70									
80									
90									
100									
110									
120									
130									
140									
150									
160									

# DIN 912 (ISO 4762)

## Zylinderschraube mit Innensechskant

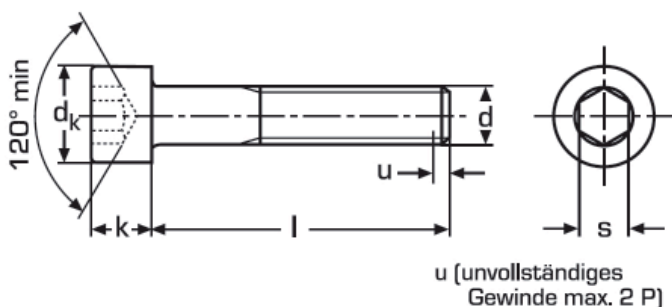

d	M 10	M 12	M 14	M 16	M 18	M 20	M 24	M 30
dk	16	18	21	24	27	30	36	45
k max.	10	12	14	16	18	20	24	30
b	32	36	40	44	48	52	60	72
s	8	10	12	14	14	17	19	22
l								
12								
14								
16								
18								
20								
25								
30								
35								
40								
45								
50								
55								
60								
65								
70								
80								
90								
100								
110								
120								
130								
140								
150								
160								
180								
200								
220								
240								
260								

Zwischenabmessungen und Überlängen auf Anfrage.