


DIN 913 (ISO 4026)


Gewindestift mit Innensechskant und Kegelkuppe

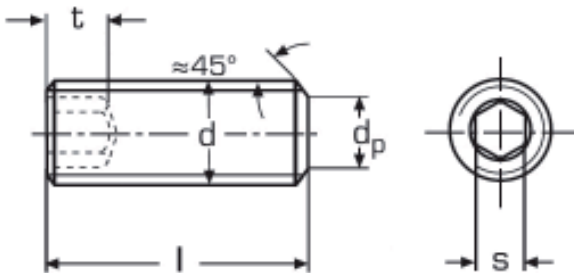

d	M1,6	M 2	M 2,5	M 3	M 4	M 5	M 6
dp max.	0,8	1,0	1,5	2,0	2,5	3,5	4,0
t	0,7	0,8	1,2	1,2	1,5	2	2
s	0,7	0,9	1,3	1,5	2	2,5	3
l							
2							
3							
4							
5							
6							
8							
10							
12							
14							
16							
20							
25							
30							
35							
40							
45							
50							
55							
60							
65							

DIN 913 (ISO 4026)

Gewindestift mit Innensechskant
und Kegelkuppe

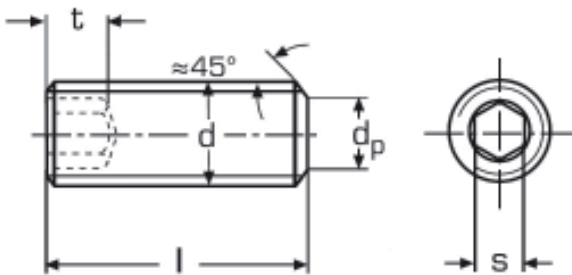

d	M 8	M 10	M 12	M 16	M 20	M 24
dp	5,5	7	8,5	12,0	15,0	18,0
t	3	4	4,8	6,4	8	10
s	4	5	6	8	10	12
l						
6						
8						
10						
12						
16						
20						
25						
30						
35						
40						
45						
50						
55						
60						
70						
80						
90						
100						