


# DIN 931 (ISO 4014)

## Sechskantschraube mit Schaft (ISO 4014 - geänderte Schlüsselweiten)

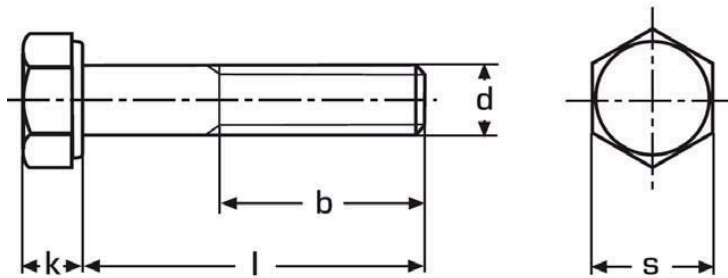


d	M 5	M 6	M 8	M 10	M 12	M 14	M 16
b ≤ 125mm	16	18	22	26	30	34	38
b ≥ 125-200mm	22	24	28	32	36	40	44
s	8	10	13	17(16)	19(18)	22 (21)	24
k min.	3,35	3,85	5,15	6,22	7,32	8,62	9,82
l							
25							
30							
35							
40							
45							
50							
55							
60							
65							
70							
75							
80							
85							
90							
100							
110							
120							
130							
140							
150							
160							
170							
180							
190							
200							

Zwischenabmessungen und Überlängen auf Anfrage.

# DIN 931 (ISO 4014)

## Sechskantschraube mit Schaft (ISO 4014 - geänderte Schlüsselweiten)

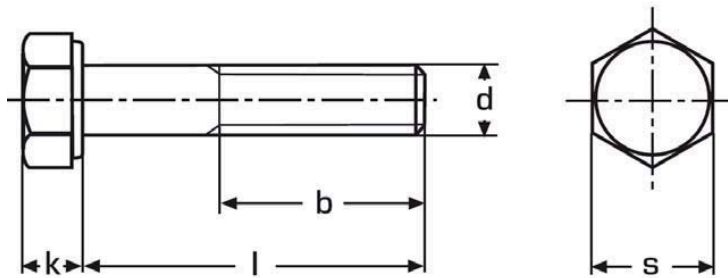

d	M 18	M 20	M 22	M 24	M 27	M 30	M 33	M 36
b ≤ 125mm	42	46	50	54	60	66	72	78
b ≥ 125-200mm	48	52	56	60	66	72	78	84
s	27	30	32 (34)	36	41	46	50	55
k min.	11,28	12,28	13,78	14,78	16,65	18,28	20,58	22,08
l								
60								
65								
70								
80								
90								
100								
110								
120								
130								
140								
150								
160								
170								
180								
190								
200								
210								
220								
230								
240								
250								
260								
270								
280								
290								
300								

Zwischenabmessungen und Überlängen auf Anfrage.