


DIN 933 (ISO 4017)

Sechskantschraube mit Gewinde bis Kopf
(ISO 4017 - geänderte Schlüsselweiten)

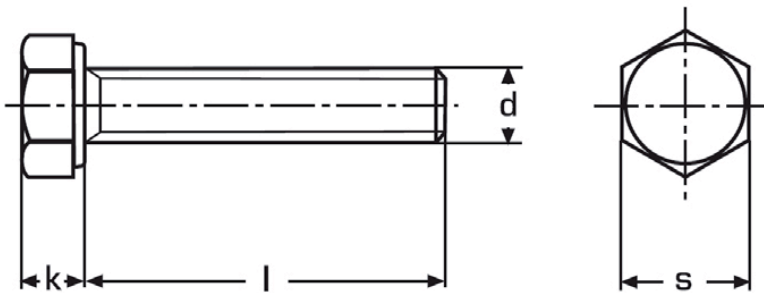


d	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 14	M 16
k max.	2,1	2,9	3,6	4,1	5,4	6,6	7,7	9	10,1
s	5,5	7	8	10	13	17(16)	19(18)	22	24
l									
6									
8									
10									
12									
14									
16									
18									
20									
25									
30									
35									
40									
45									
50									
55									
60									
65									
70									
75									
80									
85									
90									
95									
100									
110									
120									
130									
140									
150									

Zwischenabmessungen und Überlängen auf Anfrage.

DIN 933 (ISO 4017)

Sechskantschraube mit Gewinde bis Kopf
(ISO 4017 - geänderte Schlüsselweiten)

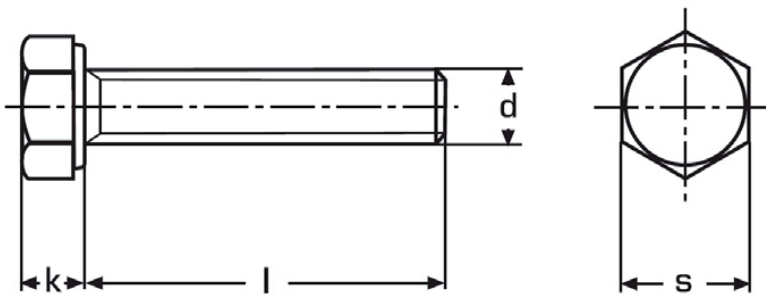

d	M 18	M 20	M 22	M 24	M 27	M 30	M 33	M 36
k max.	11,7	12,7	14,2	15,2	17,3	19,1	21,4	22,9
s	27	30	32(34)	36	41	46	50	55
l								
30								
35								
40								
45								
50								X
55								
60								X
65								
70								X
75								
80								X
85								
90								X
100								X
110								X
120								X
130								X
140								X
150								X
160								
170								
180								
190								
200								
220								
240								
250								
260								
280								

Zwischenabmessungen und Überlängen auf Anfrage.