


# DIN 960 (ISO 8765)

## Sechskantschraube mit Schaft (Feingewinde)

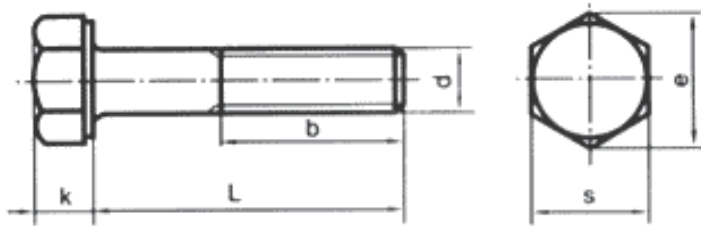

d	M8/1	M10/1	M10/1,25	M12/1,25	M12/1,5	M16/1,5	M20/1,5	M24/2
b(l<125)	22	26	26	30	30	38	46	54
k	5,3	6,4	6,4	7,5	7,5	10	12,5	15
s	13	17(16)	17(16)	19(18)	19(18)	24	30	36
l								
40								
45								
50								
55								
60								
65								
70								
80								
90								
100								
110								
120								
130								
140								
150								
160								
180								
200								
220								
240								

Zwischenabmessungen auf Anfrage.