


# DIN 914 (ISO 4027)


## Gewindestift mit Innensechskant und Spitze

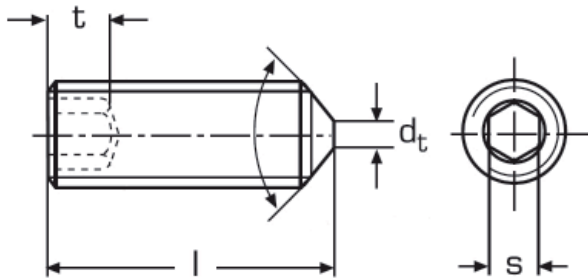

d	M 1,6	M 2	M 2,5	M 3	M 4	M 5	M 6
dt max.	0,4	0,5	0,65	0,75	1	1,25	1,5
t min.	0,7	0,8	1,2	1,2	1,5	2	2
s	0,7	0,9	1,3	1,5	2	2,5	3
l							
2							
3							
4							
5							
6							
8							
10							
12							
14							
16							
20							
25							
30							
35							
40							
45							
50							
55							
60							
70							

# DIN 914 (ISO 4027)

## Gewindestift mit Innensechskant und Spitze

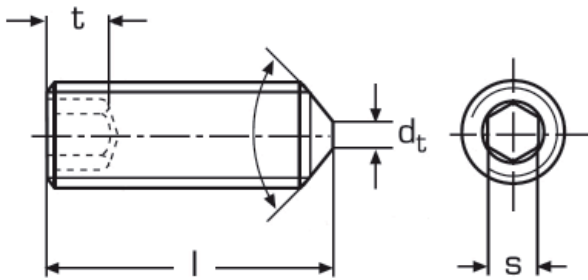

d	M 8	M 10	M 12	M 16	M 20	M 24
dt max.	2	2,5	3	4	5	6
t min.	3	4	4,8	6,4	8	10
s	4	5	6	8	10	12
l						
6						
8						
10						
12						
16						
20						
25						
30						
35						
40						
45						
50						
55						
60						
70						
80						
90						
100						