


DIN 7985 (ISO 7045)

Linsenkopfschraube mit Kreuzschlitz

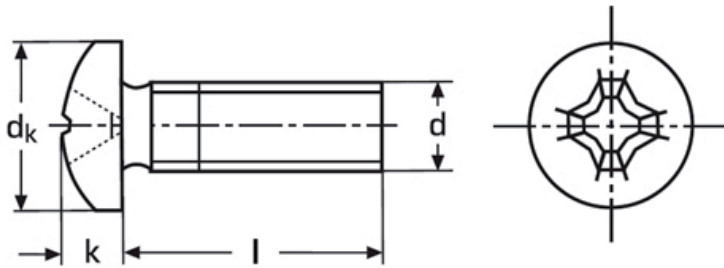

| d | M 1,6 | M 2 | M 2,5 | M 3 | M 4 | M 5 | M 6 | M 8 |
|-----|-------|-----|-------|-----|-----|-----|-----|-----|
| dk | 3,2 | 4 | 5 | 6 | 8 | 10 | 12 | 16 |
| k | 1,3 | 1,6 | 2 | 2,4 | 3,1 | 3,8 | 4,6 | 6 |
| l | | | | | | | | |
| 2 | | | | | | | | |
| 3 | | | | | | | | |
| 4 | | | | | | | | |
| 5 | | | | | | | | |
| 6 | | | | | | | | |
| 8 | | | | | | | | |
| 10 | | | | | | | | |
| 12 | | | | | | | | |
| 14 | | | | | | | | |
| 16 | | | | | | | | |
| 18 | | | | | | | | |
| 20 | | | | | | | | |
| 22 | | | | | | | | |
| 25 | | | | | | | | |
| 28 | | | | | | | | |
| 30 | | | | | | | | |
| 35 | | | | | | | | |
| 40 | | | | | | | | |
| 45 | | | | | | | | |
| 50 | | | | | | | | |
| 60 | | | | | | | | |
| 70 | | | | | | | | |
| 80 | | | | | | | | |
| 90 | | | | | | | | |
| 100 | | | | | | | | |