


DIN 960 (ISO 8765)

Sechskantschraube mit Schaft (Feingewinde)

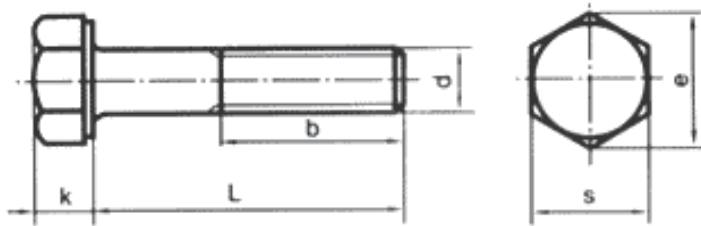

| d | M8/1 | M10/1 | M10/1,25 | M12/1,25 | M12/1,5 | M16/1,5 | M20/1,5 | M24/2 |
|----------|------|--------|----------|----------|---------|---------|---------|-------|
| b(l<125) | 22 | 26 | 26 | 30 | 30 | 38 | 46 | 54 |
| k | 5,3 | 6,4 | 6,4 | 7,5 | 7,5 | 10 | 12,5 | 15 |
| s | 13 | 17(16) | 17(16) | 19(18) | 19(18) | 24 | 30 | 36 |
| l | | | | | | | | |
| 40 | | | | | | | | |
| 45 | | | | | | | | |
| 50 | | | | | | | | |
| 55 | | | | | | | | |
| 60 | | | | | | | | |
| 65 | | | | | | | | |
| 70 | | | | | | | | |
| 80 | | | | | | | | |
| 90 | | | | | | | | |
| 100 | | | | | | | | |
| 110 | | | | | | | | |
| 120 | | | | | | | | |
| 130 | | | | | | | | |
| 140 | | | | | | | | |
| 150 | | | | | | | | |
| 160 | | | | | | | | |
| 180 | | | | | | | | |
| 200 | | | | | | | | |
| 220 | | | | | | | | |
| 240 | | | | | | | | |

Zwischenabmessungen auf Anfrage.